

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problems Mailbox.**

THIS PAGE BLANK (USPTO)

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 021 992 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

26.07.2000 Bulletin 2000/30

(51) Int. Cl.⁷: A61B 17/64

(21) Application number: 00100888.7

(22) Date of filing: 18.01.2000

(84) Designated Contracting States:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE

Designated Extension States:

AL LT LV MK RO SI

(30) Priority: 21.01.1999 IT MI990100

(71) Applicant: Medicalplastic S.r.L.
20124 Milano (IT)(72) Inventor: Hofmann, Roberto Maria
20046 Biassono (Milano) (IT)


(74) Representative:

Lunati, Vittoriano
LUNATI & MAZZONI S.a.s.
Via Carlo Pisacane, 36
20129 Milano (IT)

(54) External fixator for orthopaedics and traumatology

(57) There is disclosed a fixing device comprising: a bar (4), at least one turret-like support (8a) having an outer casing (9) movably mounted on said bar (4), an articulated joint (12) for supporting surgical elements (2), placed at an end of the turret-like support (8a) and angularly movable relative to the outer casing (9), a single locking device (15) being provided for securing the outer casing (9) to the bar (4) and locking the angular

position of the articulated joint (12), which device comprises a cam (17) movably supported by the outer casing (9) and placed between the bar (4) and the articulated joint (12) and having a forcing position at which the bar (4) and the articulated joint (12) are both locked by pressing, a single drive member (16) being also provided for operating the cam (17).

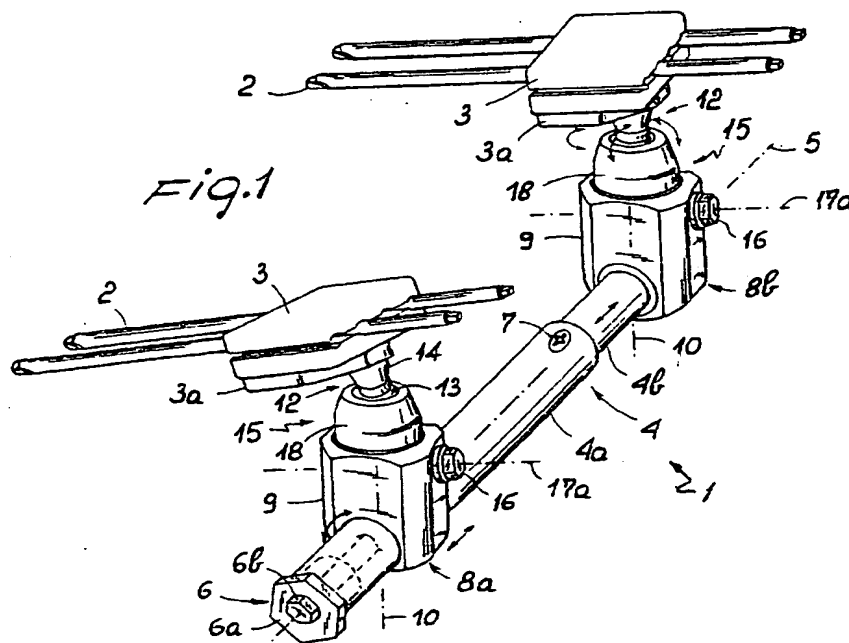

EP 1 021 992 A2

Description

[0001] The invention relates to an outer fixing device for orthopaedics and traumatology, in particular of a single-sided structure, for fixation of bone fractures.

[0002] The fixing device is of a type defined in the preamble of the accompanying Claim 1 and comprising: a bar defining a longitudinal axis, at least one turret-like support movably mounted on said bar, engagement means for drivingly fastening the position of said turret-like support on said bar, at least one articulated joint for supporting surgical elements and connected to said turret-like support, and engagement means for drivingly fixing the position of said articulated joint.

[0003] It is known that several different outer fixing devices presently exist in the orthopaedic and traumatological field for use in locking bone fragments to their correct position to enable callus formation.

[0004] Said fixing devices are apparatuses comprising a preferably tubular and telescopic bar and at least one turret-like support, also merely called turret due to its shape, emerging from the bar.

[0005] Usually two turrets are provided at least one of which is freely movable and can be freely positioned.

[0006] Turrets, by appropriate articulated joints and couplings, support surgical elements such as long and special surgical screws for example, that can be inserted by screwing into bone fragments to be held in a steady position.

[0007] Features that these apparatuses must possess are not only reliability and solidity, since any yielding or structural movement altering the established position is not admissible, but also versatility and simplicity in application.

[0008] Versatility is connected with the fact that apparatuses must adapt themselves to the most different situations, in particular because said surgical screws or in general said surgical elements must be arranged in all required directions and positions.

[0009] For the purpose, turrets must be made freely movable with respect to each other and to the telescopic bar and in addition said screws must be allowed to take various inclinations relative to the turrets supporting them.

[0010] Simplicity in application or use is important in order to avoid mounting errors and reduce operation times to a minimum in the operating theatre or the first aid station.

[0011] Reconciling these different requirements is in many instances difficult and it is pointed out in this connection that known outer fixing devices have some drawbacks.

[0012] In fact, in order to provide said turrets and surgical screws with various freedom degrees or movement and positioning directions, different technical solutions have been set up which are quite complicated and require difficult application operations. In particular, the required time for steadily locking both turrets and said

surgical elements is relatively high.

[0013] In fact it is necessary to intervene at many articulation points and tighten appropriate locking members, such as nuts, screw heads or bolts, for example.

[0014] In this way not only time and skill are required, since all points are not in a convenient access position, but, in addition, locking of some pieces may be forgotten or intervention may not be constant and reliable at all points, which greatly affects steadiness of the outer fixing devices.

[0015] Under this situation, the technical task of the invention is to provide a fixing device capable of obviating the above drawbacks.

[0016] Within the scope of this technical task it is an important aim of the invention to provide a fixing device that, while being of ready locking, has full movement and positioning possibilities as regards turrets and surgical elements.

[0017] It is a further aim of the invention to provide a fixing device which is simple and also reliable and of reduced weight.

[0018] The aims specified are achieved by an outer fixing device for orthopaedics and traumatology as claimed in the Claim 1.

[0019] Preferred embodiments of the invention are specified in the other claims.

[0020] Description of a fixing device in accordance with the invention is now given by way of non-limiting example, with reference to the drawings, in which:

- Fig. 1 is a perspective view of a fixing device of the single-sided type, taken as a whole, for fixation of bone fractures by surgical screws mounted on turret-like supports;
- Fig. 2 is an exploded view in section of a portion of the fixing device at one said turret-like support;
- Fig. 3 shows the elements of Fig. 2 in a mounted position and in a free-movement condition;
- Fig. 4 is a section taken along line IV-IV in Fig. 3;
- Fig. 5 shows the elements in Fig. 2 in a mounted position and in a tightened condition;
- Fig. 6 is a section taken along line VI-VI in Fig. 5; and
- Fig. 7 highlights the different positions of the elements in Figs. 3 and 5 by two partial sections disposed in side by side relationship.

[0021] With reference to the drawings, the fixing device in accordance with the invention is identified by reference numeral 1 and is shown in its preferred embodiment consisting of a single-sided outer fixing device for treatment of bone fractures, using surgical elements such as surgical screws.

[0022] Said screws are denoted by 2 and in Fig. 1 are for example tightened by groups through clamps 3 or similar devices, known per se.

[0023] The fixing device 1 comprises a bar 4 having a longitudinal axis 5.

[0024] Bar 4 has circular sections the centre of which is on the longitudinal axis 5 and comprises a first and a second lengths 4a and 4b which are coaxial, tubular and mutually telescopic and rotating. The first length 4a is the one having the greater diameter and it incorporates the second length 4b of smaller diameter at least partly.

[0025] Bar lengths 4a and 4b are associated with stop contrivances 6 and 7 for stopping mutual translation and rotation, respectively.

[0026] Translation-stopping contrivances 6 comprise a side cap 6a to be screwed down to a free end of the first length 4a and a long threaded rod 6b internal to the first length 4a and to be screwed down to said first length and to the second length 4b.

[0027] The rotation-stopping contrivances 7 comprise a screw to be inserted into the first length 4a in a direction transverse to the longitudinal axis 5, until engagement of the second length 4b. The screw can be associated with a runner or other device.

[0028] Mounted on bar 4, on the first length 4a and second length 4b respectively, is a first and a second turret-like supports 8a and 8b, supporting the surgical screws 2, as pointed out hereinafter.

[0029] The first turret-like support 8a can be freely positioned relative to the first length 4a, and in fact it is movable in respect of the latter both coaxially and rotatably, irrespective of the mutual positions of lengths 4a, 4b.

[0030] The second turret-like support 8b can be either movable relative to the second length 4b, or fixed to an end of said second length. In fact, for its positioning it takes advantage of the mobility of the second length 4b relative to the first length 4a and the mobility of the first turret-like support 8a relative to the first length 4a.

[0031] Each turret-like support comprises a glass-shaped outer casing 9 having an extension direction 10 passing through a substantially closed bottom 9a and an open mouth 9b. Bar 4 passes through the outer casing 9 at a hole 11 which is close to bottom 9a and directed transversely of the extension direction 10.

[0032] An articulated joint 12 is placed at mouth 9b and it is angularly movable relative to the outer casing 9 and is adapted to provide the surgical screws 2 - and generally the surgical elements mounted on the fixing device 1 - with a large possibility of angular adjustment in position.

[0033] In fact the articulated joint 12 is a ball joint comprising a spherical body 13 integral with a tailpiece 14 projecting from the outer casing 9.

[0034] The surgical screws 2 and clamps 3 are in engagement with the tailpiece 14.

[0035] Fig. 1 shows, by way of example, that clamps 3 are provided with adapter plates 3a capable of being fastened to tailpieces 14 by means of connecting screws 14a.

[0036] Engagement means and relative drive

means are provided for both the turret-like supports 8a, 8b or at least for the first support 8a movable on the first bar length 4a, for fixing position of the outer casing 9 on bar 4, and also engagement means and relative drive means are provided for fixing the angular position of the articulated joint 12.

[0037] All said engagement means are embodied, in particular for the first turret-like support 8a, by a single locking device 15.

[0038] In addition, all said relative drive means are embodied by a single member 16 for the locking device 15.

[0039] The locking device 15 comprises a cam 17 supported by the outer casing 9 and extending between bar 4 and the articulated joint 12 and such movable that, when it is in a forcing position, forced pressing contacts are set up on bar 4 and the articulated joint 12.

[0040] In detail, cam 17 is rotating and engages a tie rod 18, better specified in the following, so that when the cam rotates from an inactive position to said pressing position, tie rod 18 is moved from a rest position, where the same is freely oscillating, to a work position, at which the articulated joint 12 and bar 4 are in a fixed position with respect to the turret-like support 8a.

[0041] In the embodiment shown, for obtaining simultaneous and identical sure locking actions, tie rod 18 acts in a direct manner only on the articulated joint 12, dragging the same along and forcing it towards bar 4 until both the articulated joint 12 and bar 4 are locked.

[0042] Tie rod 18 is of tubular form and partly incorporates the spherical body 13 at one end thereof, taking a substantially bell-shaped conformation on the whole.

[0043] Then a counter-block 19 is provided between the spherical body 13 and bar 4 and it can be stressed to compression between them when the bell-shaped tie rod 18 drags along the spherical body 13 towards bar 4.

[0044] Counter-block 19 directly engages with the spherical body 13, and its shape matches that of said spherical body at an end cavity 19a, while it is in engagement with bar 4 upon interposition of a saddle-shaped coupling 20 conforming in shape to the bar itself.

[0045] Practically, when the bell-shaped tie rod 18 drags along the spherical body 13 towards bar 3, the counter-block 19 is compressed between the spherical body 13, on the one hand, and the saddle-shaped coupling 20 and bar 4, on the other hand.

[0046] The saddle-shaped coupling 20 is guided to its correct position by a guide dowel 21 to be inserted into a groove 21a. The guide dowel is necessary when turret 8a is mounted externally of bar 4.

[0047] Cam 17 is preferably embodied by a shaped pin rotating under the action of said drive member 16 around a rotation axis 17a. The rotation axis 17a of the cam or shaped pin 17 is transverse to the extension direction 10 of the outer casing 9 of the first turret-like support 8a. The cam or shaped pin 17 has a central

eccentric portion 22 and ends 23 rotatably connected to the outer casing 9.

[0048] The eccentric portion 22 has circular sections clearly offset with respect to the rotation axis 17a and the bell-shaped tie rod 18 is in engagement with the eccentric portion 22 at annular holes 18a.

[0049] It is then to be noted that the eccentric portion 22 passes through the counter-block 19 with play, at a through hole 19b of wide sizes.

[0050] The described technical solution has the advantage that very precise sizes for the different members are not required and that the same locking for pivot 12 and bar 4 is assured.

[0051] In a different embodiment, the bell-shaped tie rod 18 may have such a length that in its work position it directly engages bar 4 too, through the saddle-shaped coupling 22. The bell-shaped tie rod 18 in this case must have an exactly gauged length, greater than that shown.

[0052] A further embodiment using the same elements but of demanding construction, may provide that cam 17 in the forcing position shown in Figs. 5 and 6 should also engage counter-block 19, thereby pressing this counter-block too in addition to pressing tie rod 18.

[0053] In this instance, position of the through hole 19b must be very precise, as well as sizes of all elements, in order to avoid a weak locking of the articulated joint 12 and a strong locking of bar 4.

[0054] It will be also recognised that the drive member 16 is embodied by the head of the shaped pin 17 projecting from the outer casing 9 of the turret-like support and operable by a spanner. In fact it has the shape of a nut.

[0055] On the opposite side from the drive member 16, the shaped pin 17 is engaged by an axial set screw 24 making position of pin 17 steady relative to the outer casing 9.

[0056] Operation of the fixing device 1 is as follows, with particular reference to Fig. 7 showing two operating positions in side by side relationship.

[0057] The surgical elements or screws 2 must be arranged and applied in a manner known per se. Positions vary case by case depending on requirements and choices done.

[0058] The fixing device 1 is employed to keep the previously selected or reached positions steady and is capable of adapting itself to these positions.

[0059] In fact, the fixing device 1 may accept any position of the surgical elements, due to the telescopic bar having lengths 4a, 4b to be freely positioned, to the possibility of movement of at least one turret-like support 8a on bar 4, and to the articulated joints 12 by which the surgical elements 2 are connected with the turret-like supports 8a, 8b.

[0060] This situation is highlighted in Figs. 3 and 4 and on the left side of Fig. 7 where no forcing is applied to the spherical body 13 and to bar 4.

[0061] When the optimal position has been identified,

both fixing of lengths 4a, 4b through the stop contrivances 6 and 7 and locking of the turret-like supports and articulated joints with the aid of the locking device 15 can be executed in an immediate and reliable manner.

[0062] Said locking device is set in operation by the nut-shaped drive member 16 through a common spanner.

[0063] In fact, by rotating the drive member 16 around the rotation axis 17a, the shaped pin 17 passes from the preceding inactive position to the forcing position shown in Figs. 5 and 6 and on the right side of Fig. 7, i.e. with the central eccentric portion 22 moved towards bar 4.

[0064] In this way the bell-shaped tie rod 18, in turn, passes from the preceding rest position to the work position, shifted towards bar 4, without on the other hand getting into contact with the latter or the saddle-shaped coupling 20.

[0065] The bell-shaped tie rod 18 moves the spherical body 13 and the counter-block 19.

[0066] Moving forward of counter-block 19 towards bar 4 is however stopped by the bar itself that, upon interposition of the saddle-shaped coupling 20, sets into forced contact with counter-block 19.

[0067] Under this situation block 19 is pressed between the articulated joint 12 and bar 4 and prevents them from moving.

[0068] Locking is also automatically applied to the articulated joint and the bar, because they are aligned on the same kinematic chain.

[0069] Movement of counter-block 19 towards bar 4 is not hindered by its being passed through by the shaped pin 17 because crossing takes place at a through hole 19b of very large sizes, capable of avoiding interference.

[0070] The invention achieves important advantages.

[0071] In fact, a fixing device has been made in which the surgical elements are provided with different degrees of freedom or movement and positioning directions, so that all requirements can be met.

[0072] This result has been reached by adopting a simple and reliable technical solution that above all has the advantage of being lockable by means of a single and simple drive involving rotation of a spanner. Therefore the application time is greatly reduced.

[0073] In addition, tightening is completely reliable and error proof because the locking device 15 is capable of acting on the articulated joint and the bar simultaneously, with the same force and without any possibility of errors. In fact it is the articulated joint that is dragged along towards the bar to achieve locking of both of them.

Claims

1. An outer fixing device for orthopaedics and traumatology, comprising: a bar (4) defining a longitudinal

axis (5), at least one turret-like support (8a) having an outer casing (9) movably mounted on said bar (4), engagement means and relative drive means for fastening said outer casing (9) to said bar (4), at least one articulated joint (12) for supporting surgical elements (2) connected to said turret-like support (8a) and angularly movable relative to said outer casing (9), and engagement means and relative drive means for locking the angular position of said articulated joint (12),

- characterised in that, in order to secure said outer casing (9) to said bar (4) and lock the angular position of said articulated joint (12), a single locking device (15) is provided which comprises at least one cam (17) movably supported by said outer casing (9) and placed between said bar (4) and articulated joint (12) and showing a forcing position at which said bar (4) and articulated joint (12) are both locked by pressing,
- and in that a single drive member (16) active on said cam (17) is provided for operating said locking device (15).

2. A fixing device as claimed in Claim 1, wherein said locking device (15) comprises a tie rod (18) extending between said cam (17) and said articulated joint (12), said tie rod (18) being shiftable from said cam (17) between a rest position, at which said articulated joint (12) is oscillating, and a work position, at which said articulated joint (12) is held to a fixed position by said tie rod (18).
3. A fixing device as claimed in Claim 2, wherein said articulated joint (12) comprises a spherical body (13) and wherein said tie rod (18) is of tubular configuration and partly incorporates said spherical body (13).
4. A fixing device as claimed in Claim 2, wherein said locking device (15) comprises a counter-block (19) inserted between said articulated joint (12) and bar (4), and wherein said tie rod (18) is adapted to forcibly drag along said articulated joint (12) towards said bar (4) until said counter-block (19) is tightened and stressed to compression between said articulated joint (12) and bar (4) and to lock them by pressing.
5. A fixing device as claimed in Claim 4, wherein said counter-block (19) has a shape substantially matching said articulated joint (12) and can be directly engaged by said joint, and wherein a saddle-like coupling (20) substantially conforming in shape to said bar (4) is inserted between said counter-block (19) and bar (4).

6. A fixing device as claimed in Claim 4, wherein said cam (17) is a shaped rotating pin defining a rotation axis (17a) and passing through said counter-block (19) with play, and wherein said shaped pin has ends (23) coaxial with said rotation axis (17a) and rotatably supported by said outer casing (9), and at least one eccentric portion (22) placed between said ends (23) and engaging said tie rod (18).

7. A fixing device as claimed in Claim 6, wherein said eccentric portion (22) has, perpendicularly to said rotation axis (17a), a circular section offset relative to said rotation axis (17a).

8. A fixing device as claimed in Claim 1, wherein said cam (17) is a shaped pin rotatably supported by said outer casing (9) and wherein said drive member (16) is a head of said shaped pin projecting from said outer casing (9) and operable by a spanner.

9. A fixing device as claimed in Claim 1, wherein said outer casing (9) is glass-shaped and has a bottom (9a), an open mouth (9b) and an extension direction (10) passing through said bottom (9a) and open mouth (9b), wherein said bar (4) passes through said outer casing (9) at said bottom (9a), and wherein said articulated joint (12) is located at said open mouth (9b).

10. A fixing device as claimed in Claim 1, wherein said bar (4) has circular sections and comprises a first and a second lengths (4a, 4b) coaxial and telescopic with each other and mutually rotating, and stop contrivances for stopping translation and rotation (6, 7) between said first and second bar lengths (4a, 4b).

11. A fixing device as claimed in Claim 1, wherein said turret-like support (8b) is movable coaxially of said bar (4) and rotating about said longitudinal axis (5), in the absence of locking.

12. A fixing device as claimed in Claim 10, wherein provision is made for a first turret-like support (8a) to be adjustably positioned relative to said first length (4a) of said bar (4) and a second turret-like support (8b) fixed to said second length (4b), at an end of said bar (4).





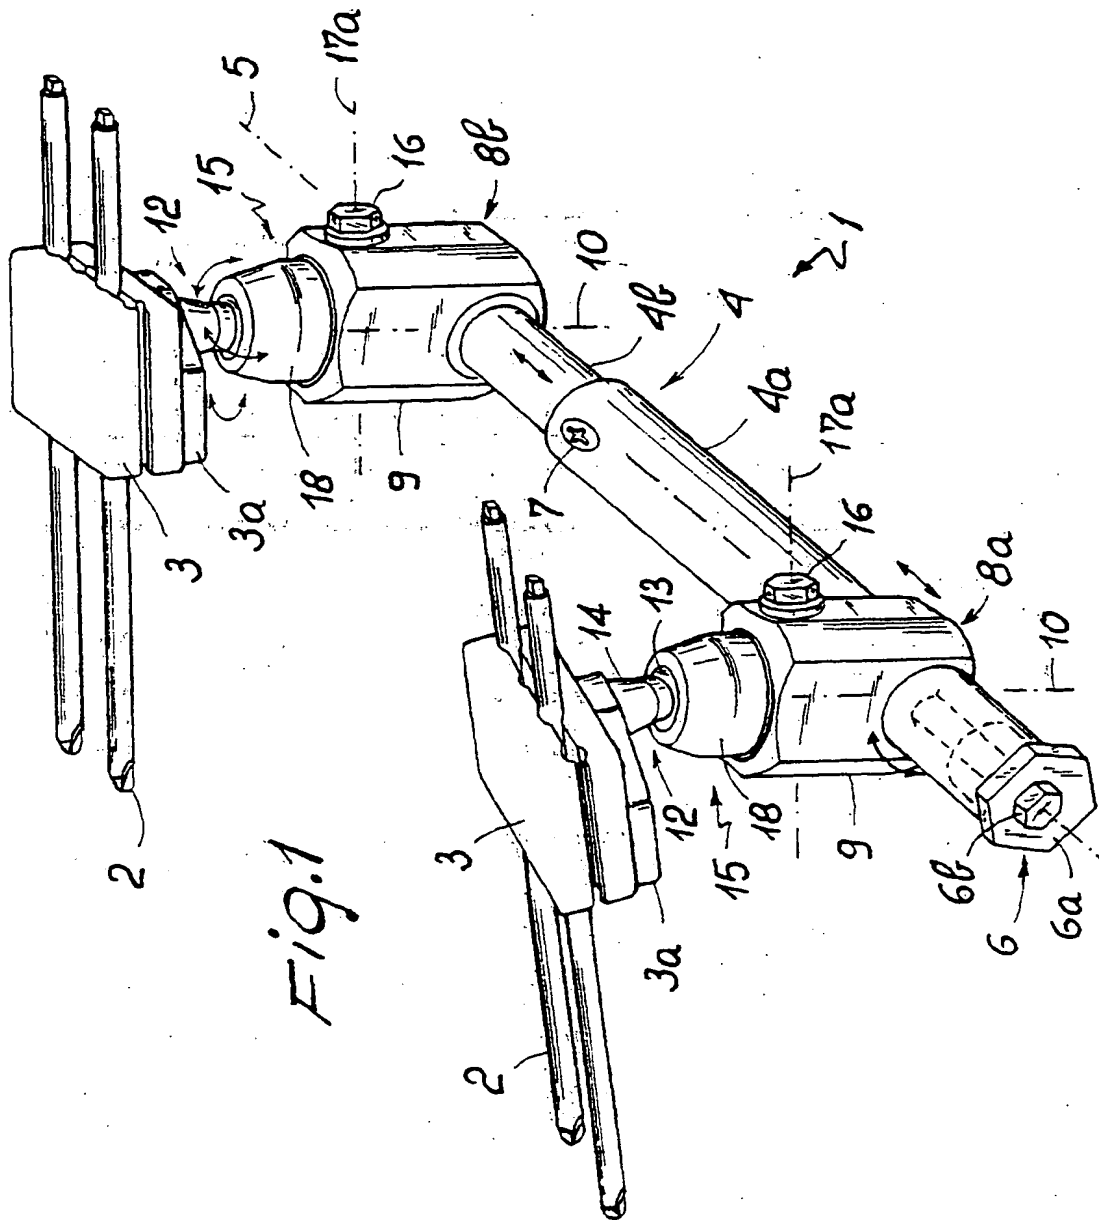



Fig. 2

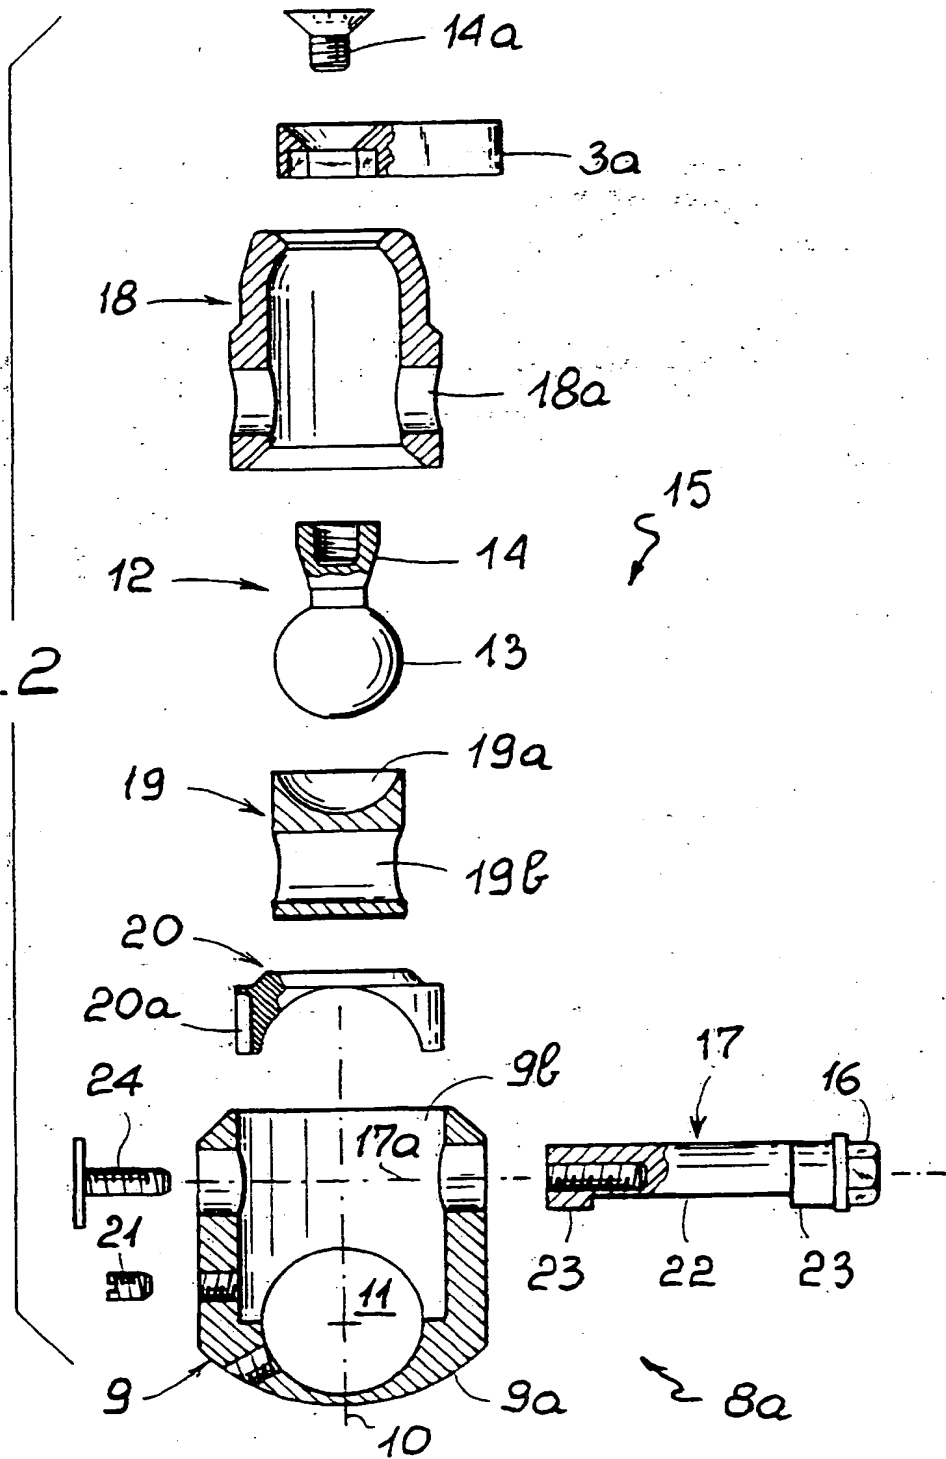

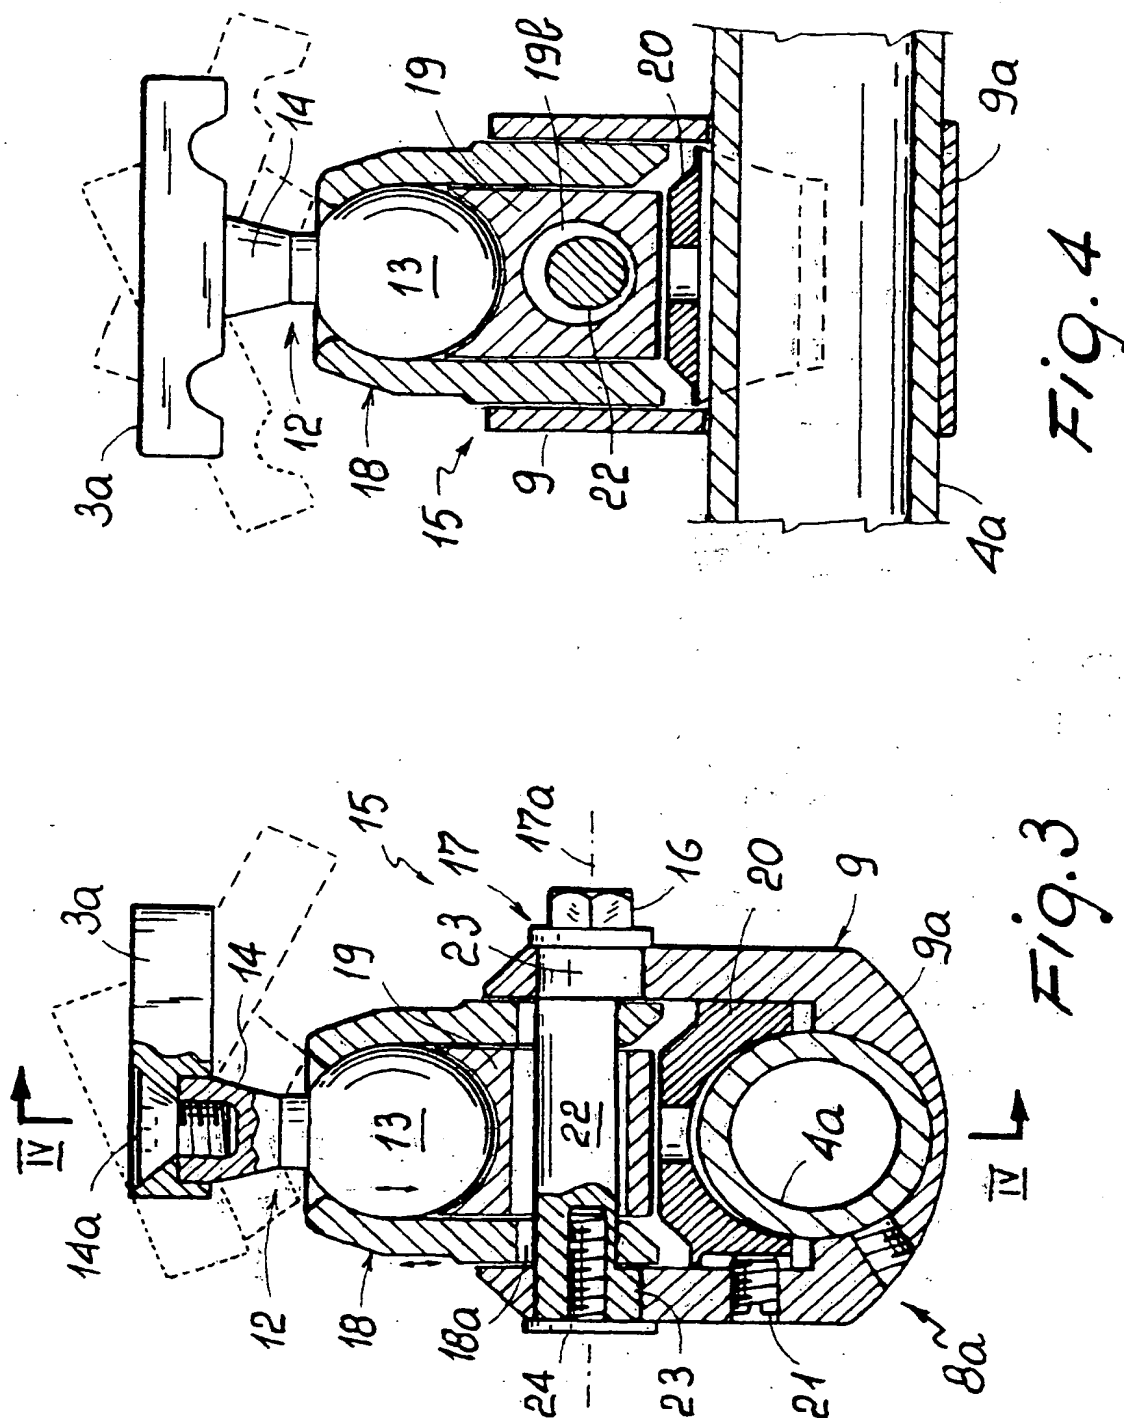

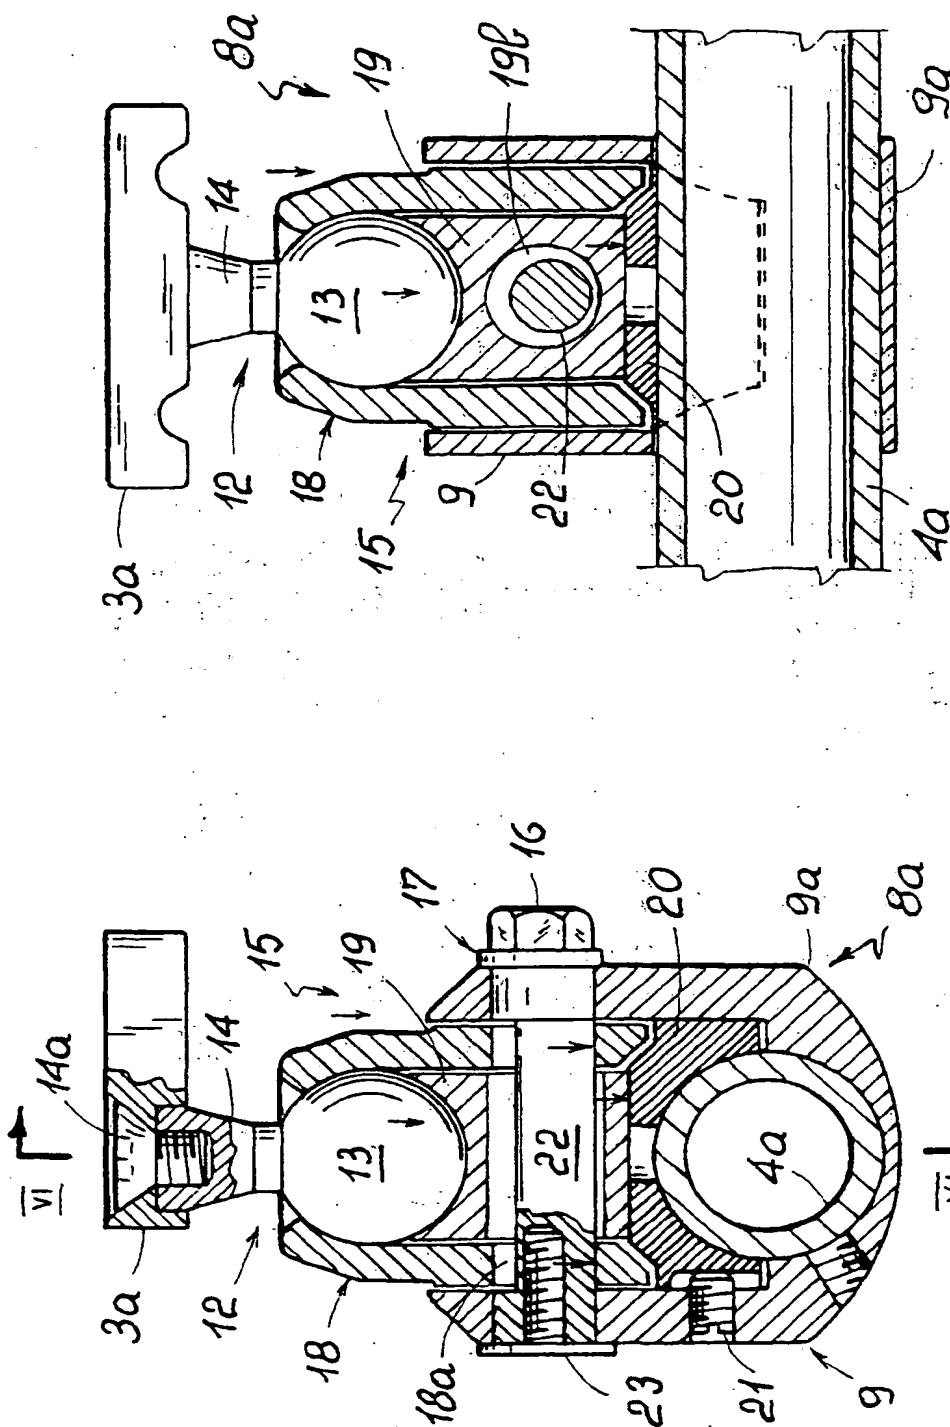

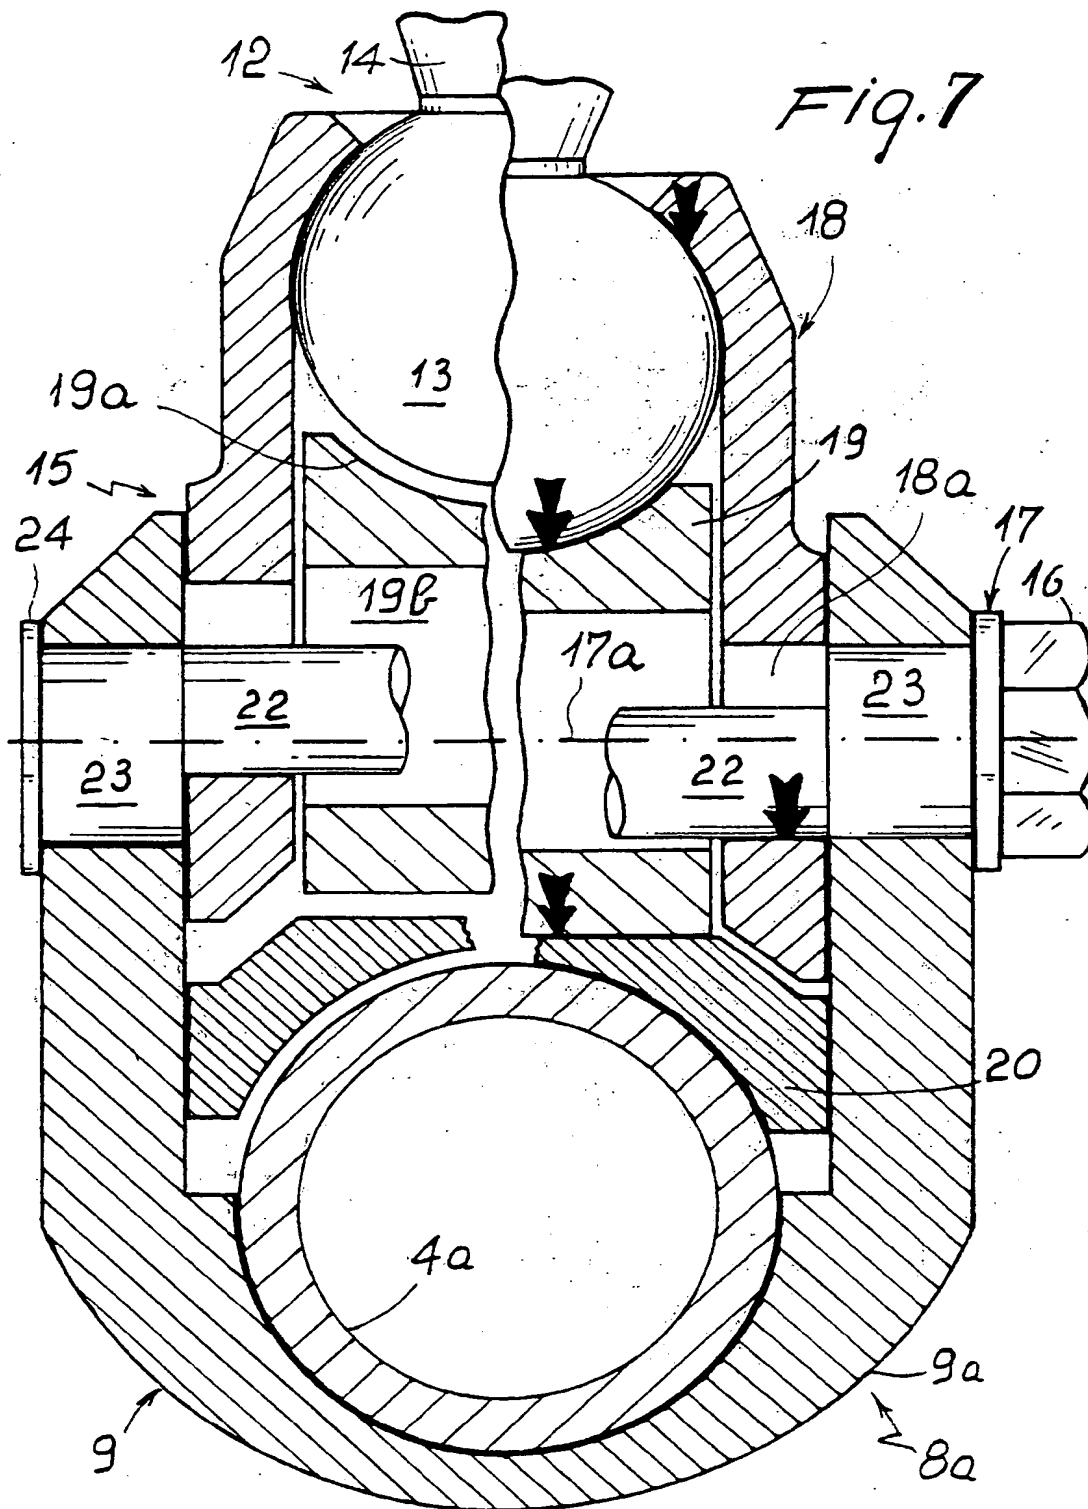



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 021 992 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
15.01.2003 Bulletin 2003/03

(51) Int Cl.7: **A61B 17/64**

(43) Date of publication A2:
26.07.2000 Bulletin 2000/30

(21) Application number: 00100888.7

(22) Date of filing: 18.01.2000

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: **Hofmann, Roberto Maria**
20046 Biassono (Milano) (IT)

(74) Representative: **Lunati, Vittoriano**
LUNATI & MAZZONI S.a.s.
Via Carlo Pisacane, 36
20129 Milano (IT)


(30) Priority: 21.01.1999 IT MI990100

(71) Applicant: **Medicalplastic S.r.L.**
20124 Milano (IT)

(54) **External fixator for orthopaedics and traumatology**

(57) There is disclosed a fixing device comprising: a bar (4), at least one turret-like support (8a) having an outer casing (9) movably mounted on said bar (4), an articulated joint (12) for supporting surgical elements (2), placed at an end of the turret-like support (8a) and angularly movable relative to the outer casing (9), a single locking device (15) being provided for securing the

outer casing (9) to the bar (4) and locking the angular position of the articulated joint (12), which device comprises a cam (17) movably supported by the outer casing (9) and placed between the bar (4) and the articulated joint (12) and having a forcing position at which the bar (4) and the articulated joint (12) are both locked by pressing, a single drive member (16) being also provided for operating the cam (17).

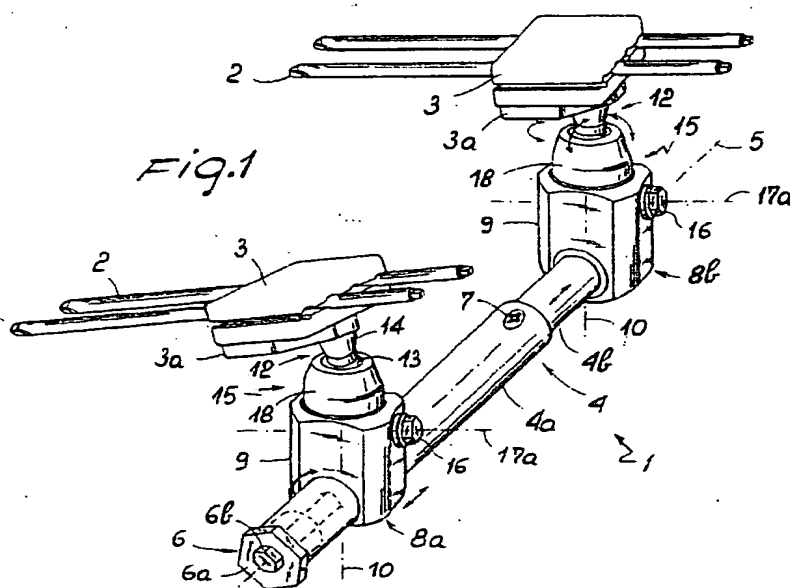



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

EP 00 10 0888

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	US 5 160 335 A (WAGENKNECHT MARCEL H) 3 November 1992 (1992-11-03) *, sentence 3 - page 10, paragraph 51; figure 1 *	1	A61B17/64
A	US 5 601 551 A (TAYLOR HAROLD S ET AL) 11 February 1997 (1997-02-11) * column 6, line 38 - line 51; figures 3-5 * figure 6 *	1,8	
A	US 5 393 161 A (MATA JACQUES ET AL) 28 February 1995 (1995-02-28) * abstract; figure 1 * * column 4, line 25 - line 28; figures 2-4	1	
A	US 5 312 402 A (SCHLAEPFER JOHANNES F ET AL) 17 May 1994 (1994-05-17) * column 4, line 30 - line 46; figure 6 *	1	
A	US 5 827 282 A (PENNIG DIETMAR) 27 October 1998 (1998-10-27) * column 2, line 25 - column 3, line 2; figures 1,2 *	1	TECHNICAL FIELDS SEARCHED (Int.Cl.7) A61B
A	US 4 848 368 A (KRONNER RICHARD F) 18 July 1989 (1989-07-18) * column 2, line 41 - line 57; figure 1 *	1	
A	WO 97 41790 A (WOTTON HAROLD M III ;KRAUS KARL H (US); UNIV TUFTS (US)) 13 November 1997 (1997-11-13) * page 10, line 6 - line 29; figure 3 *	1	
The present search report has been drawn up for all claims			
Place of search BERLIN		Date of completion of the search 20 November 2002	Examiner Ducreau, F
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03/92 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 10 0888

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

20-11-2002

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5160335	A	03-11-1992	CH 678485 A5	30-09-1991
			JP 1917101 C	23-03-1995
			JP 3193045 A	22-08-1991
			JP 6040884 B	01-06-1994
			AT 125438 T	15-08-1995
			CA 2005318 A1	15-06-1990
			DE 8914594 U1	08-02-1990
			DE 68923604 D1	31-08-1995
			DE 68923604 T2	25-01-1996
			DK 614189 A	16-06-1990
			EP 0374093 A1	20-06-1990
			ES 2075072 T3	01-10-1995
			IL 92708 A	25-01-1994
			NO 895019 A ,B,	18-06-1990
US 5601551	A	11-02-1997	AU 4925996 A	18-09-1996
			EP 0813392 A1	29-12-1997
			JP 2000516105 T	05-12-2000
			WO 9626679 A1	06-09-1996
US 5393161	A	28-02-1995	CH 684928 A5	15-02-1995
			AT 133053 T	15-02-1996
			AU 647551 B2	24-03-1994
			AU 8828391 A	11-06-1992
			CA 2056152 A1	11-06-1992
			DE 9115231 U1	04-06-1992
			DE 69116534 D1	29-02-1996
			DE 69116534 T2	05-06-1996
			EP 0490812 A1	17-06-1992
			ES 2084803 T3	16-05-1996
			IE 914279 A1	17-06-1992
			JP 1903541 C	08-02-1995
			JP 4300533 A	23-10-1992
			JP 6028667 B	20-04-1994
			KR 184525 B1	01-04-1999
			PT 99707 A	31-01-1994
US 5312402	A	17-05-1994	CH 683024 A5	31-12-1993
			AT 109251 T	15-08-1994
			CA 2066352 A1	17-10-1992
			DE 59200310 D1	01-09-1994
			EP 0509322 A1	21-10-1992
			JP 3188306 B2	16-07-2001
			JP 5146452 A	15-06-1993
US 5827282	A	27-10-1998	DE 9108566 U1	10-10-1991

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 10 0888

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

20-11-2002

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5827282 A		US 5376090 A	27-12-1994
		AT 129881 T	15-11-1995
		CA 2073602 A1	13-01-1993
		DE 59204236 D1	14-12-1995
		EP 0522355 A1	13-01-1993
		ES 2080384 T3	01-02-1996
		JP 5184598 A	27-07-1993
US 4848368 A	18-07-1989	NONE	
WO 9741790 A	13-11-1997	US 5746741 A	05-05-1998
		US 5976133 A	02-11-1999
		AU 710260 B2	16-09-1999
		AU 2827097 A	26-11-1997
		EP 0907336 A2	14-04-1999
		JP 2002515782 T	28-05-2002
		WO 9741790 A2	13-11-1997
		US 6340361 B1	22-01-2002

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82